


Performance you can rely on.

Engine oils – classifications, specifications and licensing

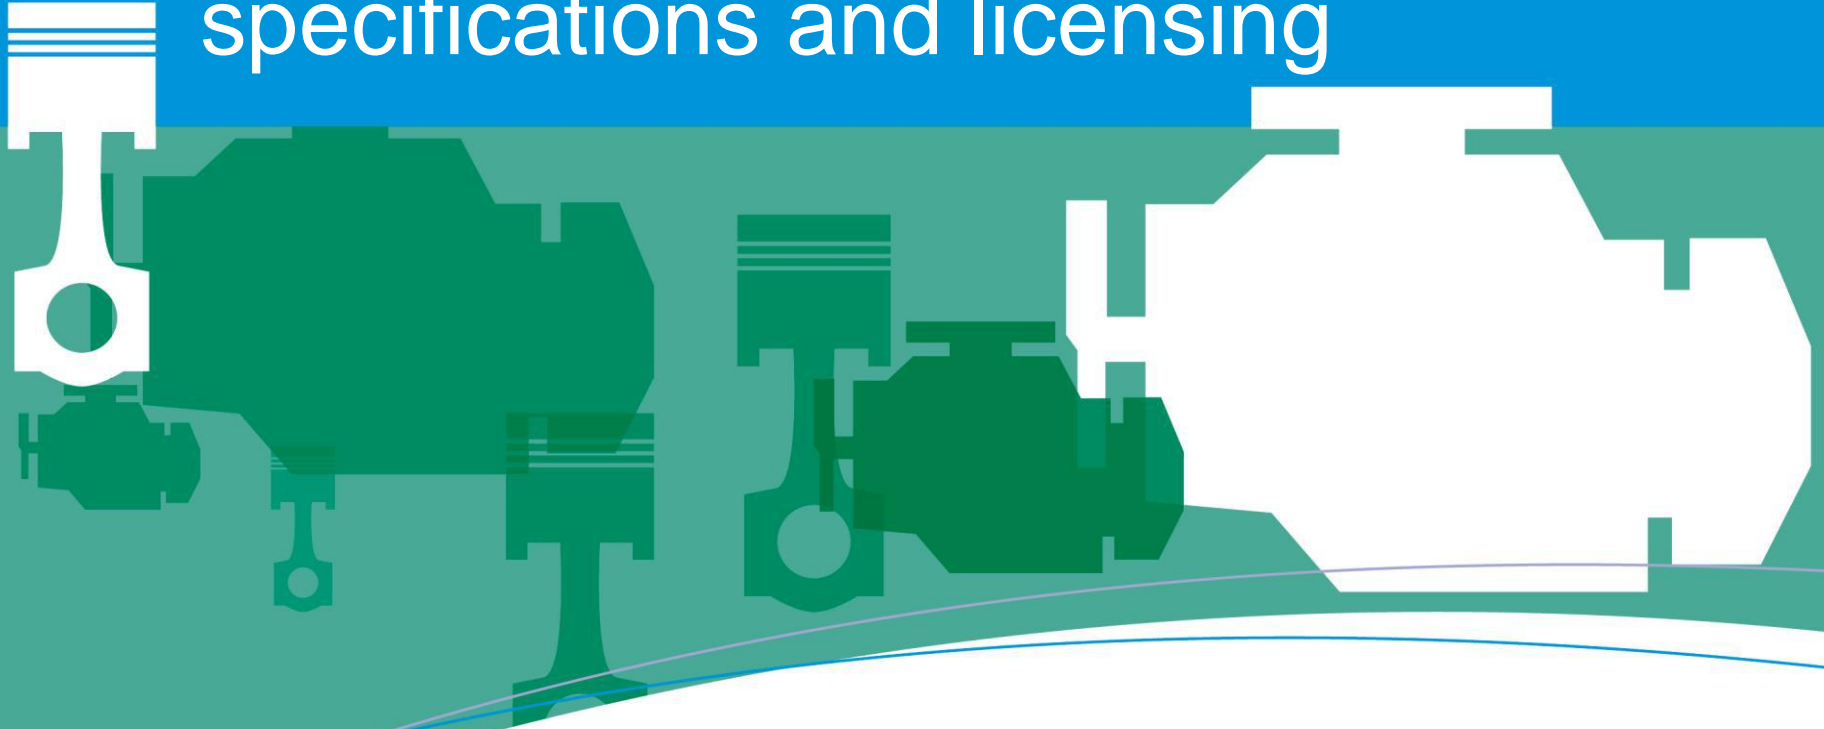

InfineumInsight.com/Learn


© INFINEUM INTERNATIONAL LIMITED 2017. All Rights Reserved.



Outline

- Main drivers for engine oil classification and specifications
- Relevant industry groups and bodies
- Specification overview – focus on Europe and North America
- Engine oil quality management and licensing

Oil and additive industry value chain

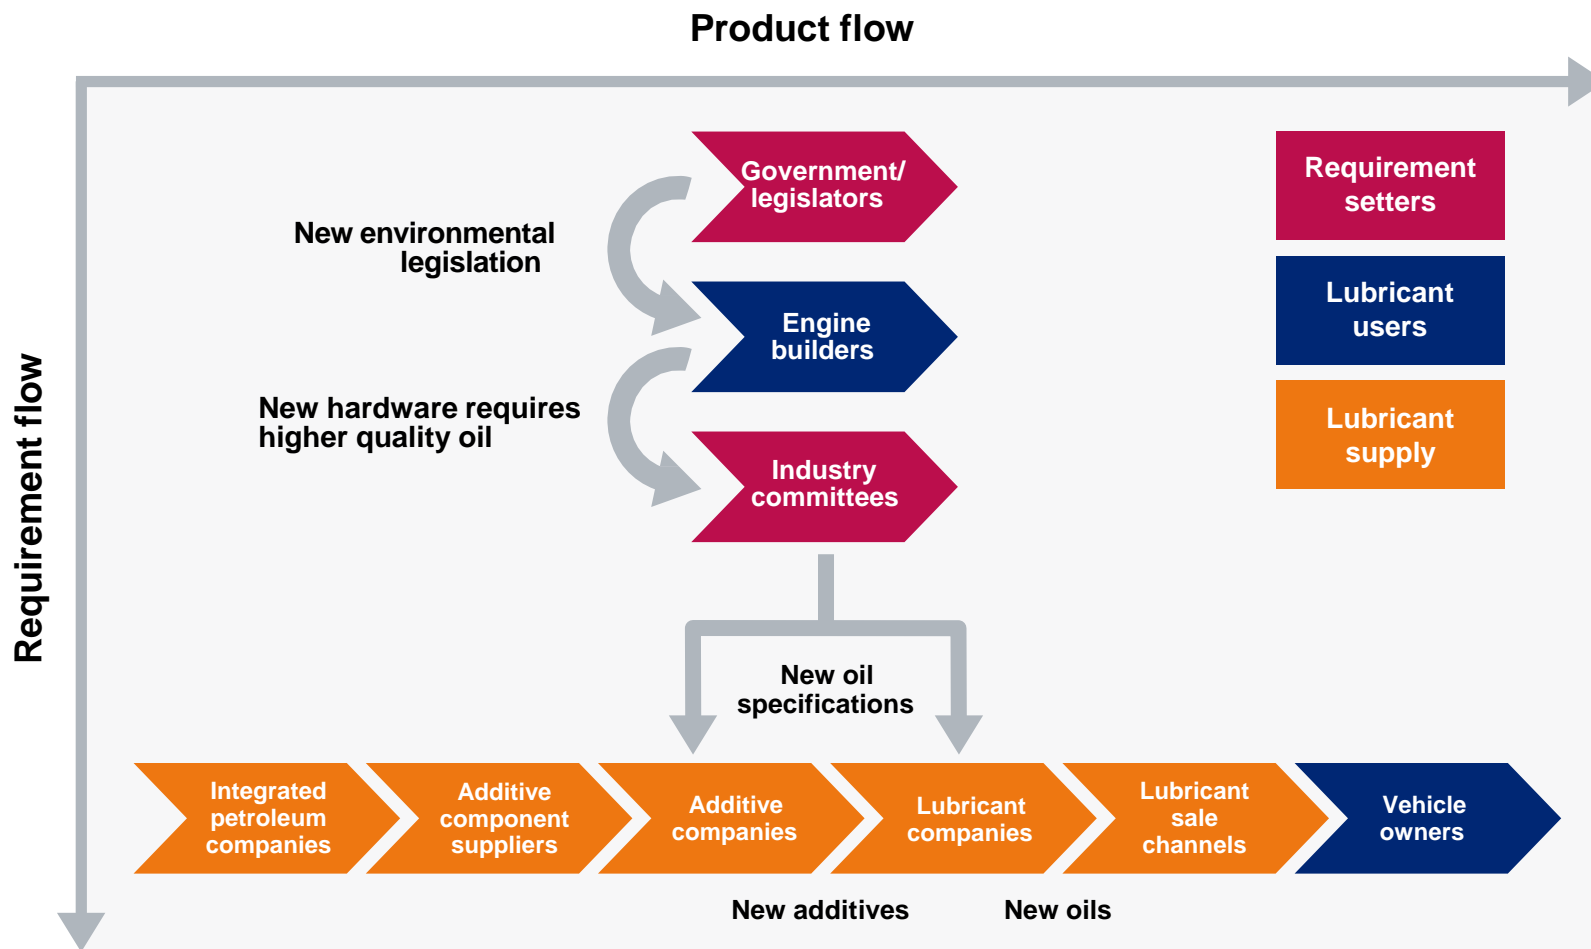

Organisations classifying engine performance

Industry associations

- ACEA → European Automobile Manufacturers Association
- API → American Petroleum Institute
- ILSAC → International Lubricant Standardization & Advisory Committee
- JASO → Japanese Automobile Standards Organization



Vehicle or Original Engine Manufacturers (OEMs), such as:


- General Motors (GM)
- Volkswagen (VW)
- Daimler
- Volvo
- Ford
- MAN
- Scania
- Toyota



Industry trade organization responsibilities


Description	Europe	North America	Japan
Engine builders (passenger car)	ACEA	AAM, JAMA	JAMA
Engine builders (commercial)	ACEA	EMA	JAMA
Oil marketers base oil suppliers	ATIEL	API	JASO
Additive companies	ATC	API, ACC	
Specifications	ACEA	API, ILSAC	JASO
Test procedures	CEC	ASTM	JASO
Approvals		API	

Engine tests are the basis of specifications

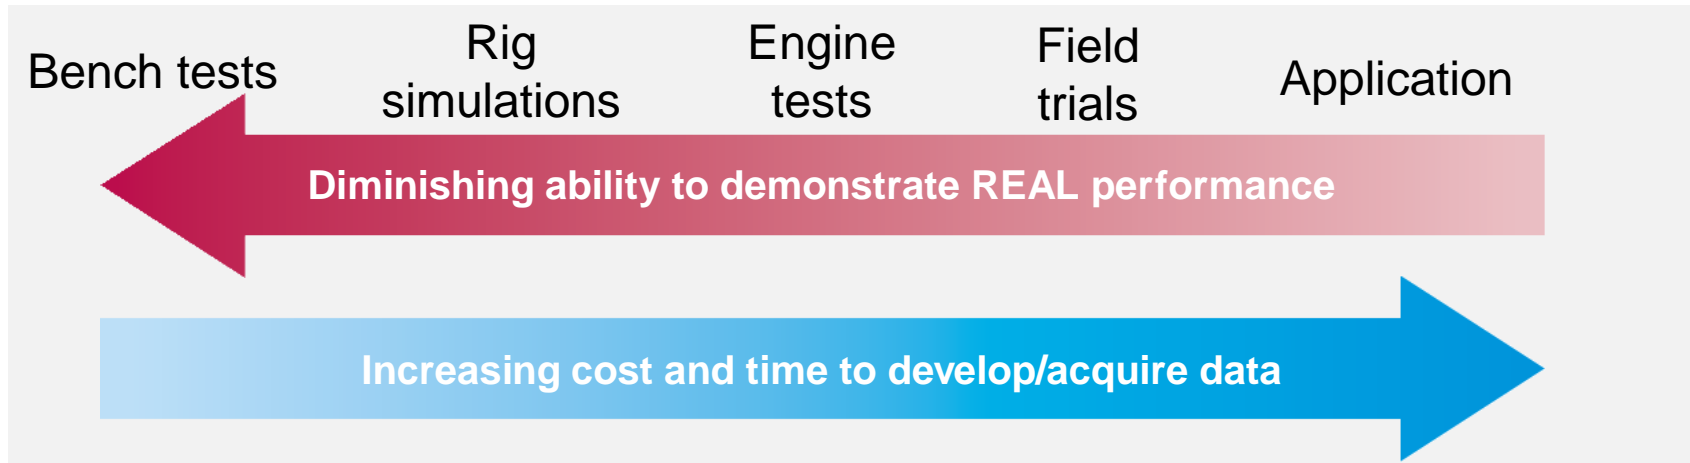


- Developed by individual OEMs or industry groups to target specific performance parameters of concern
- Assessed relative to reference oil of known field performance
- Developments consider:
 - parts availability and quality
 - test conditions and duration
 - parameters of interest and pass/fail limits
 - qualification of test facilities
- Monitored continually by industry
- Specifications derived from compilation of engine tests and limits

Engine Oil Specifications: Europe

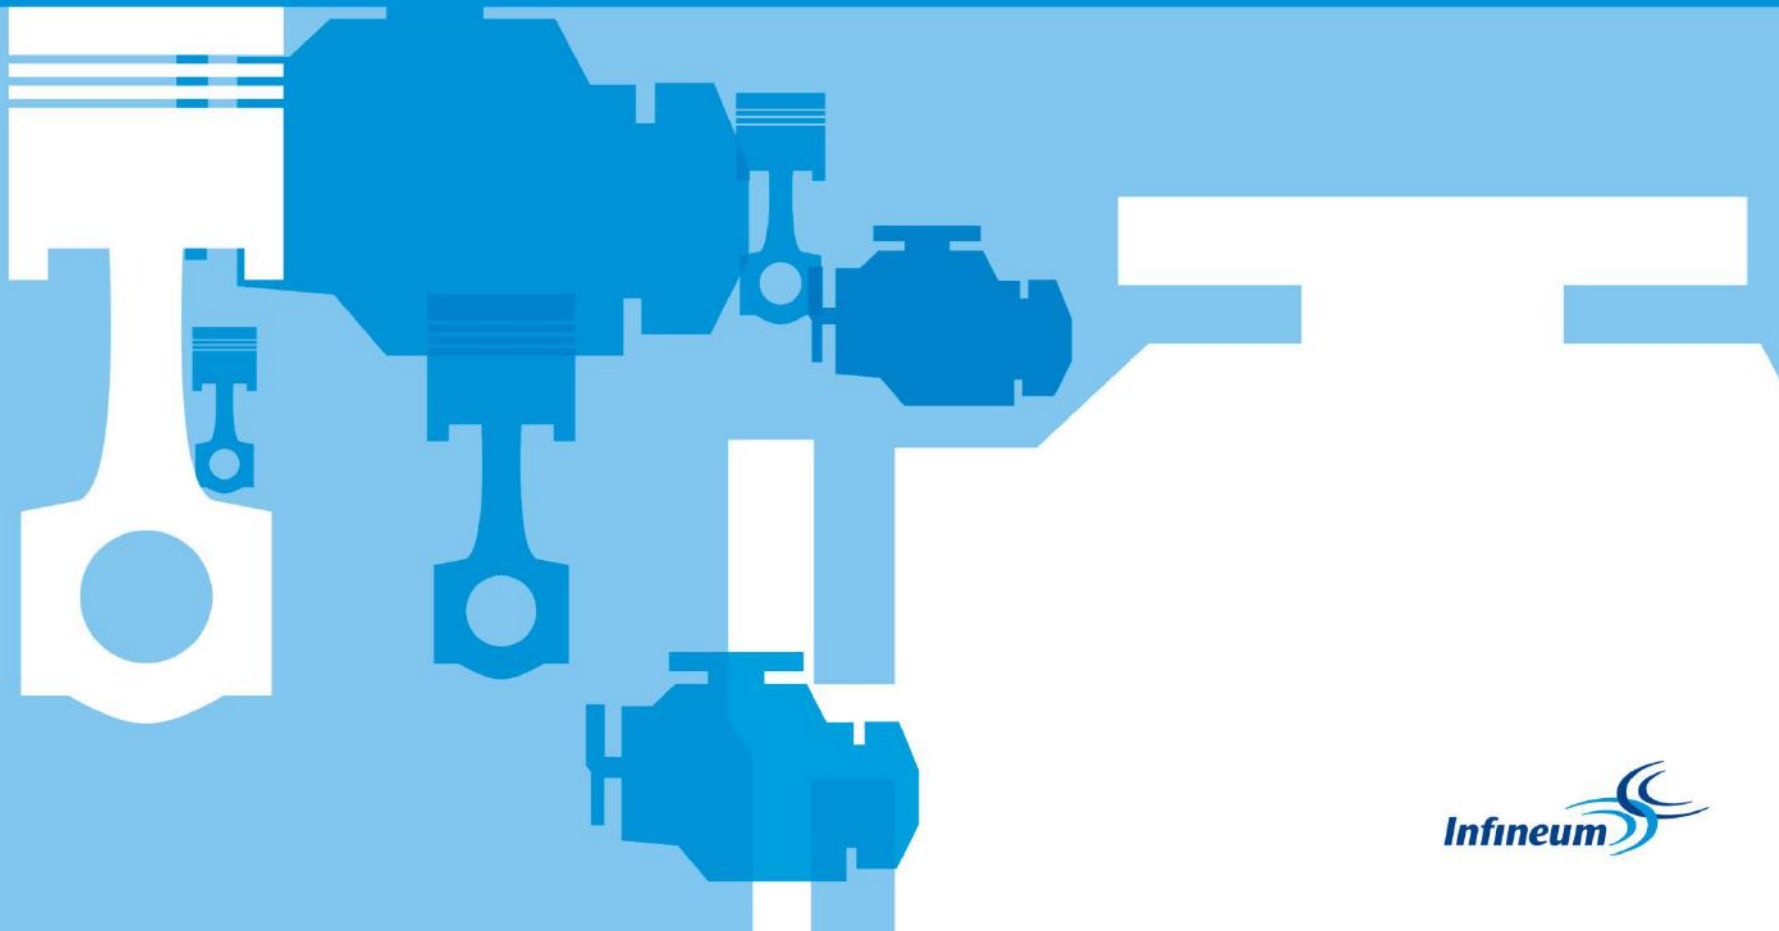

ACEA Sequences

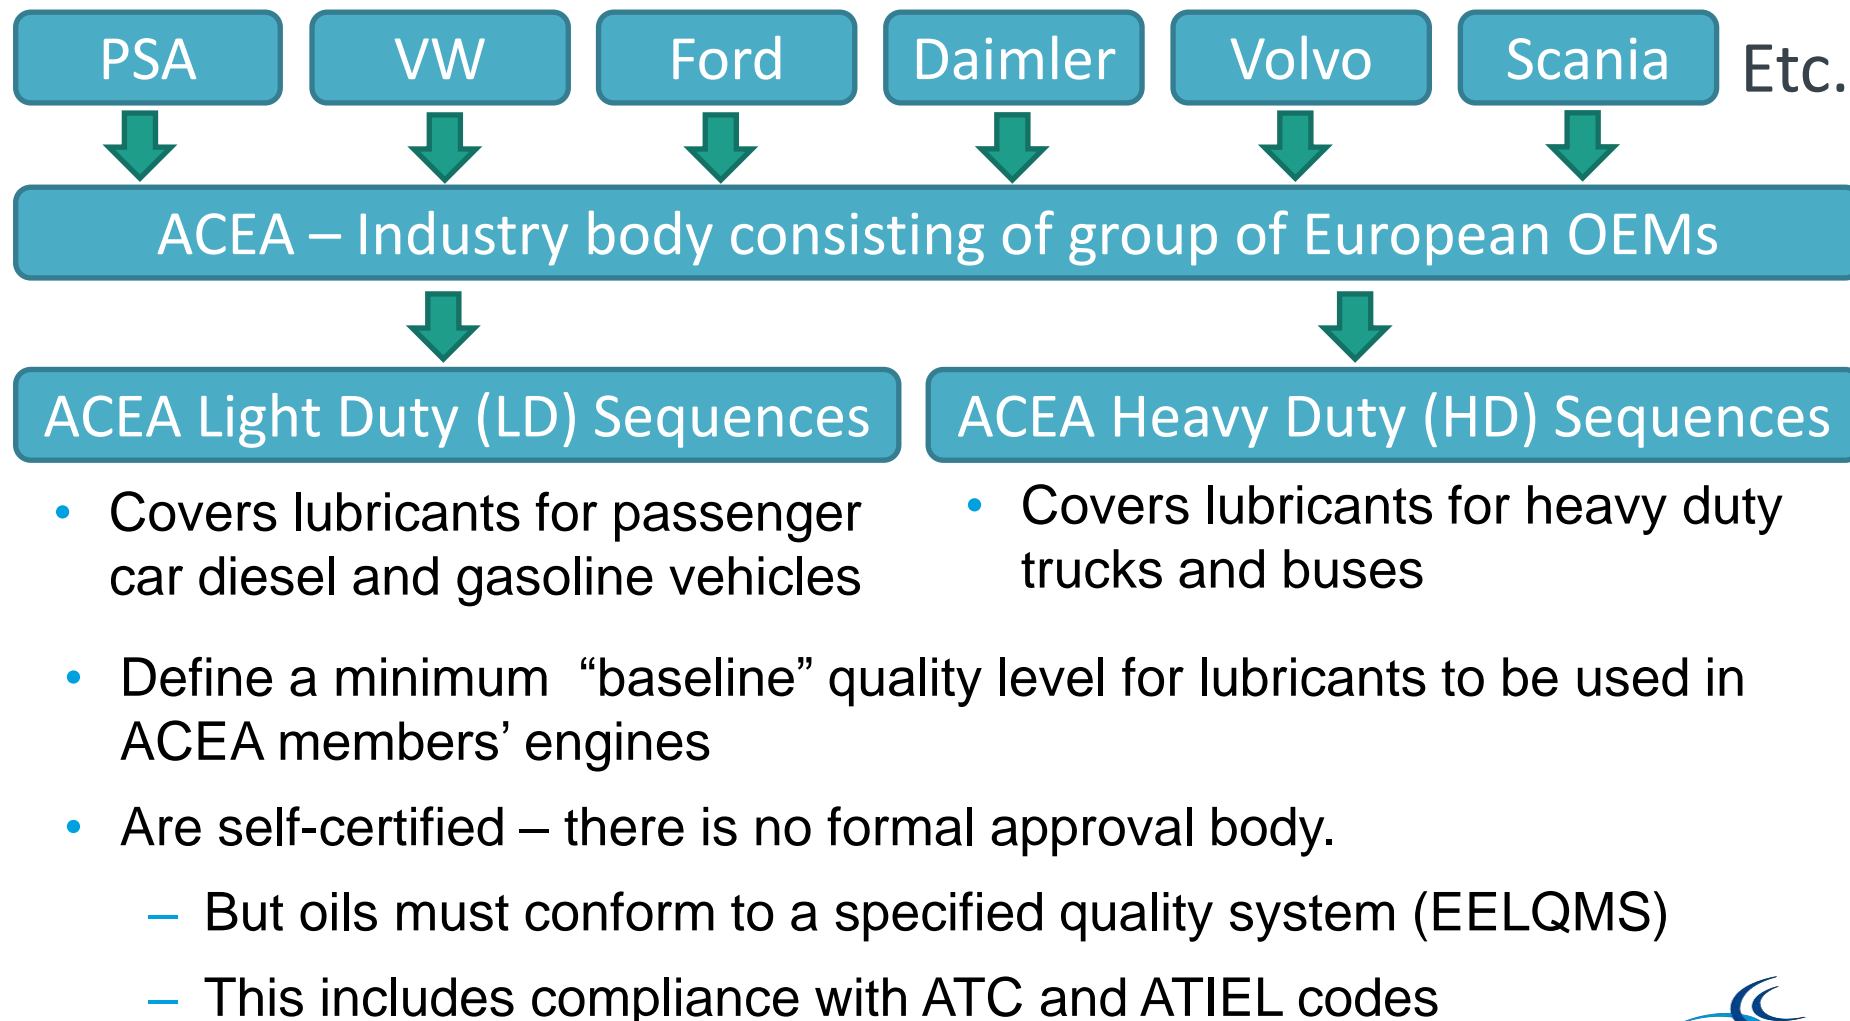

ACEA 2016

- **Latest ACEA Sequences – ACEA 2016**

- **Objectives**

- Keeping pace with advancement in engine technology and the trend to lower viscosity grades
- Replace tests coming to the end of life
- Introduce tests for biodiesel compatibility



ACEA 2016 Sequences

ACEA LD Sequences

Gasoline & Light Duty
Diesel Engine Oils
A/B Categories

A3/B3-16

A3/B4-16

A5/B5-16

Catalyst & GPF compatible
Engine Oils for Gasoline &
Light Duty Diesel Engines
C-Categories

C1-16

C2-16

C3-16

C4-16

C5-16

ACEA HD Sequences

Heavy Duty Diesel Engine
Oils
E-Categories

E4-16

E6-16

E7-16

E9-16



Important Bench and Analytical Tests for ACEA A/B and C Categories

Lubricant property	Test	A3/B3	A3/B4	A5/B5	C1	C2	C3	C4	C5
"SAPS" Levels	<u>S</u> ulphated <u>A</u> sh (ASTM D874)	H	H	H	L	M	M	L	M
	<u>P</u> hosphorus (ASTM D5185)	report			L	M	M	M	M
	<u>S</u> ulphur (ASTM D5185)	report			L	M	M	L	M
Total Base Number	TBN (ASTM D2896)	M	H	M	L				
High Temperature Viscosity	HTHS (CEC L-036-90)	H	H	M	M	M	H	H	L
Oxidation with Biodiesel	"L-109" (CEC L-109)	X	X	X	X	X	X	X	X
Elastomer Compatibility	Seals Tests (CEC L-112-16)	X	X	X	X	X	X	X	X

Catalyst-compatible oils



Important Bench and Analytical Tests for ACEA A/B and C Categories

Lubricant property	Test	A3/B3	A3/B4	A5/B5	C1	C2	C3	C4	C5
"SAPS" Levels	<u>S</u> ulphated <u>A</u> sh (ASTM D874)	≥ 0.9 ≤ 1.5	≥ 1.0 ≤ 1.6	≤ 1.6	≤ 0.5	≤ 0.8	≤ 0.8	≤ 0.5	≤ 0.8
	<u>P</u> hosphorus (ASTM D5185)	report			≤ 0.05	≥ 0.07 ≤ 0.09	≥ 0.07 ≤ 0.09	≤ 0.05	≥ 0.07 ≤ 0.09
	<u>S</u> ulphur (ASTM D5185)	report			≤ 0.2	≤ 0.3	≤ 0.3	≤ 0.2	≤ 0.3
Total Base Number	TBN (ASTM D2896)	≥ 8.0	≥ 10.0	≥ 8.0	L				
High Temperature Viscosity	HTHS (CEC L-036-90)	≥ 3.5	≥ 3.5	≥ 2.9 ≤ 3.5	M	M	H	H	L
Oxidation with Biodiesel	"L-109" (CEC L-109)	X	X	X	X	X	X	X	X
Elastomer Compatibility	Seals Tests (CEC L-112-16)	X	X	X	X	X	X	X	X

Catalyst-compatible oils



Engine tests for ACEA A/B and C categories

Lubricant property	Test	Engine supplier	A3/B3	A3/B4	A5/B5	C1	C2	C3	C4	C5
Gasoline DI engine cleanliness	CEC L-111-16 (EP6CDT)	Peugeot	X	X	X	X	X	X	X	X
Low temperature sludge	ASTM D6593-00 (Sequence VG)	Ford	X	X	X	X	X	X	X	X
Black sludge	Currently using non-CEC test (M271)	Daimler	X	X	X	X	X	X	X	X
Fuel economy	CEC L-054-96 (M111)	Daimler			X	X	X	x	x	X
Medium temperature oil dispersion	CEC L-106-16 (DV6C)	Peugeot	X	X	X	X	X	X	X	X
Wear	CEC L-099-08 (OM646LA)	Daimler	X	X	X	X	X	X	X	X
DI diesel Piston cleanliness & Ring sticking	CEC L-078-99 (VW TDI)	VW	X	X	X	X	X	X	X	X
Effects of biodiesel	CEC L-104-16 (OM646LA Bio)	Daimler		X	X	X	X	X	X	X

Catalyst-compatible oils

ACEA 2016 Sequences

ACEA LD Sequences

Gasoline & Light Duty
Diesel Engine Oils
A/B Categories

A3/B3-16

A3/B4-16

A5/B5-16

Catalyst & GPF compatible
Engine Oils for Gasoline &
Light Duty Diesel Engines
C-Categories

C1-16

C2-16

C3-16

C4-16

C5-16

ACEA HD Sequences

Heavy Duty Diesel Engine
Oils
E-Categories

E4-16

E6-16

E7-16

E9-16



ACEA E categories: heavy-duty diesel engine oils

ACEA E4

- **Excellent** control of piston cleanliness, wear, soot handling and lubricant stability
- It is recommended for highly rated diesel engines meeting Euro I, Euro II, Euro III, Euro IV and Euro V emission requirements and running under **very** severe conditions
- It is suitable for engines **without** particulate filters, and for **some** EGR engines and **some** engines fitted with SCR NOx reduction systems

ACEA E6

- **Excellent** control of piston cleanliness, wear, soot handling and lubricant stability
- It is recommended for highly rated diesel engines meeting Euro I, Euro II, Euro III, Euro IV, Euro V **and Euro VI** emission requirements and running under **very** severe conditions
- It is suitable for EGR engines, with or without particulate filters, and for engines fitted with SCR NOx reduction systems



ACEA E categories: heavy-duty diesel engine oils

ACEA E7

- **Effective** control with respect to piston cleanliness and bore polishing. It further provides **excellent** wear control, soot handling and lubricant stability
- It is recommended for highly rated diesel engines meeting Euro I, Euro II, Euro III, Euro IV and Euro V emission requirements and running under severe conditions
- It is suitable for engines **without** particulate filters, and for **most** EGR engines, and **most** engines fitted with SCR NOx reduction systems

ACEA E9

- **Effective** control with respect to piston cleanliness and bore polishing. It further provides **excellent** wear control, soot handling and lubricant stability
- Recommended for highly rated diesel engines meeting Euro I, Euro II, Euro III, Euro IV Euro V and **Euro VI** emission requirements and running under severe conditions
- It is suitable for engines with or without particulate filters, and for most EGR engines and for most engines fitted with SCR NOx reduction systems



Important Bench and Analytical tests for ACEA E Categories

Lubricant property	Test	E4	E6	E7	E9
"SAPS" Levels	Sulphated Ash (ASTM D874)	H	M	H	M
	Phosphorus (ASTM D5185)	-	L	-	M
	Sulphur (ASTM D5185)	-	L	-	M
Total Base Number	TBN (ASTM D2896)	H	L	M	L
High Temperature Viscosity	HTHS (CEC L-036-90)	H	H	H	H
Oxidation with Biodiesel	"L-109" (CEC L-109)	X	X	X	X

Important Bench and Analytical tests for ACEA E Categories

Lubricant property	Test	E4	E6	E7	E9
"SAPS" Levels	Sulphated Ash (ASTM D874)	≤ 2.0	≤ 1.0	≤ 2.0	≤ 1.0
	Phosphorus (ASTM D5185)	-	≤ 0.08	-	≤ 0.12
	Sulphur (ASTM D5185)	-	≤ 0.3	-	≤ 0.4
Total Base Number	TBN (ASTM D2896)	≥ 12	≥ 7	≥ 9	≥ 7
High Temperature Viscosity	HTHS (CEC L-036-90)	≥ 3.5	≥ 3.5	≥ 3.5	≥ 3.5
Oxidation with Biodiesel	"L-109" (CEC L-109)	X	X	X	X

Engine tests for ACEA E Categories

Lubricant property	Test	Engine supplier	E4	E6	E7	E9
Wear	CEC L-099-08 (OM646LA)	Daimler	X	X	x	x
Soot in oil	ASTM D 5967 (Mack T-8E) ¹	Volvo North America	X	X	X	X
Bore polishing Piston Cleanliness	CEC L-101-08 (OM501LA)	Daimler	X	X	X	X
Soot induced wear	ASTM D7468 (Cummins ISM)	Cummins			X	X
Wear (liner-ring- bearings)	ASTM D7422 (Mack T-12)	Volvo North America		X	X	X
Effects of biodiesel	CEC L-104-16 (OM646LA Bio)	Daimler		X		X

¹ E4, E6, E7 and E9 all now use Mack T-8E. However Mack T11 (ASTM D7156) results obtained as part of API CI-4, CI-4 Plus, CJ-4, CK-4 or FA-4 approval program can be used in place of Mack T8E.

ACEA 2016 – what's changed?

- **Light Duty Sequences**

- A1/B1 removed – Requirements covered by A5/B5 (HTHS 2.9-3.5) and C5 (HTHS 2.6)
- C5 introduced – New Mid SAPS category with improved FE benefits (HTHS 2.6 vs 2.9-3.5)

- **New Lab Bench Test**

- HTHS at 100°C report requirement introduced – all LD/HD categories
- Harmonisation of PDSC requirements – HD only
- CEC L-109 oxidation test replaces GFC oxidation test in LD categories
 - Introduced as new test for HD
- CEC L-39 elastomer test replaced by new CEC L-112 elastomer compatibility test – all LD/HD categories

ACEA 2016 – what's changed?

- **New Engine Tests**

- EP6 (CEC L-111) introduced – LD only
 - GDI TC engine – piston cleanliness (main parameter) and TC deposit (safety parameter)
- DV4 (CEC L-93) replaced by new DV6 (CEC L-106) – LD only
- OM646Bio (CEC L-104) with performance limits (LD + HD (E6/E9 only))

- **End of life Engine Tests**

- TU3 and TU5 have been withdrawn from the ACEA Sequences

- **“State of flux” Engine Tests**

- Seq VG is predicted to become unavailable during 2017
 - Seq VH to be introduced once ready (as per ACEA 2016 footnote)
- The new M271EVO sludge test is still under development by CEC
 - Currently a Daimler version is in use (no CEC number)
- Mack T8E replaces T11 for HD E9 – T11 still allowable alternative


ACEA 2016

Timetable for ACEA Product Claims:


Sequence issue	First allowable use	Mandatory for new claims	Oils with this claim may be marketed until
2004	1 st November 2004	1 st November 2005	31 st December 2009
2007	1 st February 2007	1 st February 2008	23 rd December 2010
2008	22 nd December 2008	22 nd December 2009	22 nd December 2012
2010	22 nd December 2010	22 nd December 2011	22 nd December 2014
2012	14 th December 2012	14 th December 2013	1 st December 2018
2016	1 st December 2016	1 st December 2017	–

- Products may still claim ACEA 2012 and 2016 as indicated by dates above
- Next planned sequence is ACEA 2018 – still under discussion

North American specification system

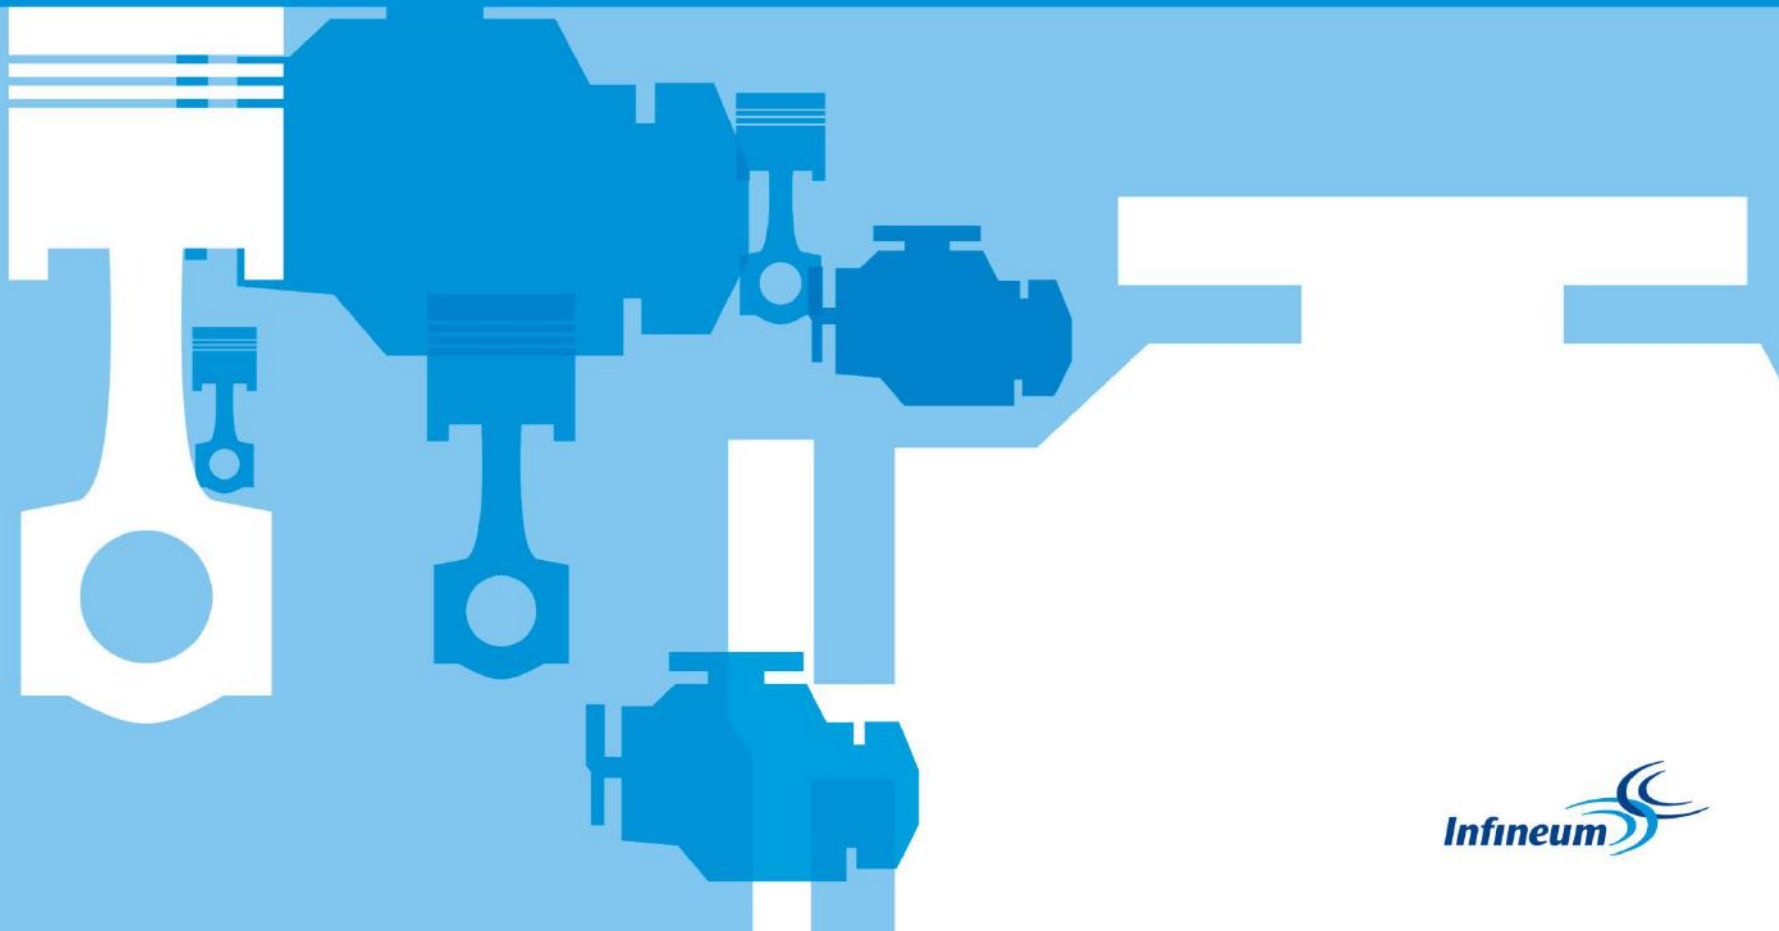

Evolution of API engine oil specifications

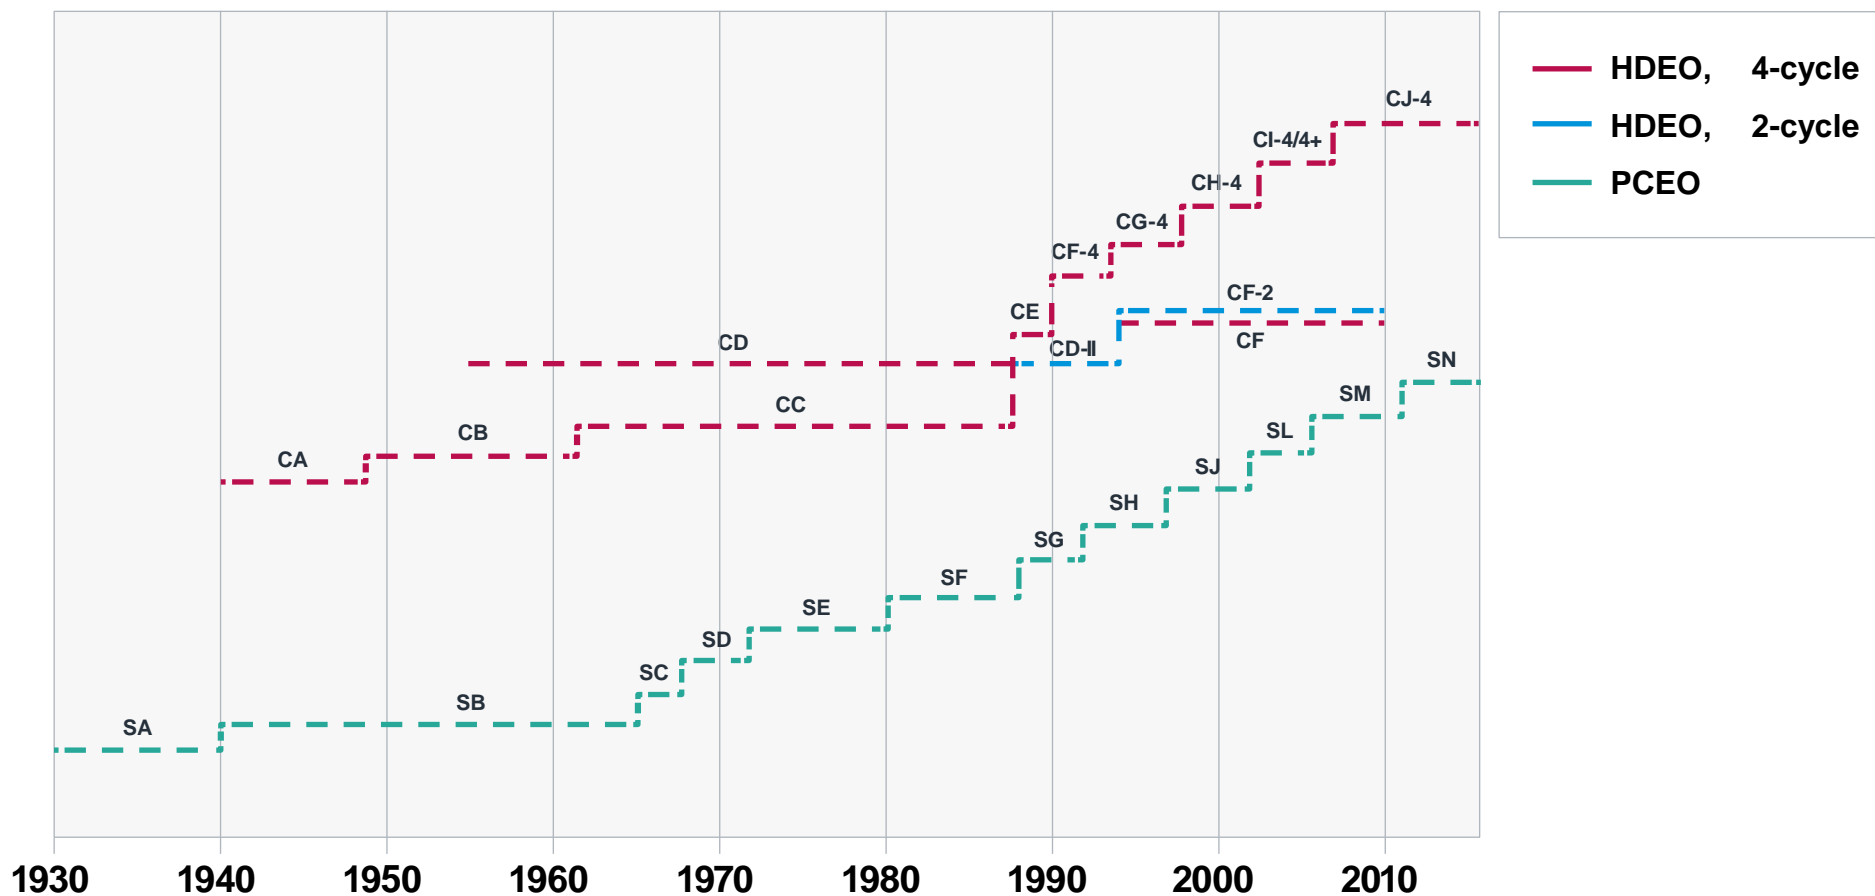

API diesel specifications

API Category	Status	API recommendations
CK-4	Current	<p>Introduced in 2016</p> <p>To meet 2017 model year on-highway exhaust emission standards</p> <p>Sulfur content up to 500 ppm (0.05% by weight)</p> <p>> 15 ppm (0.0015% by weight) may impact exhaust aftertreatment system durability and/or drain interval (Consult engine manufacturer)</p> <p>Effective at sustaining durability of emission control system (particulate filters and other advanced aftertreatment systems)</p> <p>Can be used in CH-4, CI-4, CI-4+, CJ-4 applications</p>
CJ-4	Current	<p>Introduced in 2006</p> <p>To meet 2010 model year on-highway exhaust emission standards</p> <p>Sulfur content up to 500 ppm (0.05% by weight)</p> <p>> 15 ppm (0.0015% by weight) may impact exhaust aftertreatment system durability and/or drain interval (Consult engine manufacturer)</p> <p>Can be used in CF-4, CG-4, CH-4, CI-4, CI-4+ applications</p>




API diesel specifications

API Category	Status	API recommendations
CI-4	Current	<p>Introduced in 2002</p> <p>To meet 2004 exhaust emission standards (implemented in 2002)</p> <p>For engines with EGR using up to 0.5% sulfur in fuel</p> <p>Can be used in CD, CE, CF-4, CG-4 and CH-4 applications</p> <p>Some may qualify for CI-4+ designation</p>
CH-4	Current	<p>Introduced in 1998</p> <p>To meet 1998 exhaust emission standards</p> <p>Up to 0.5% sulfur in fuel</p> <p>Can be used in CD, CE, CF-4 and CG-4 applications</p>
CA, CB, CC, CD, CD-II*, CE, CF, CF-2*, CF-4, CG-4	Obsolete	Not recommended for modern diesel engines

* Specifications for two-stroke diesel engines

API CK-4 & FA-4: Oxidation & Fuel Economy

- New fuel economy and greenhouse gas rules began phased implementation in 2014 with full effect in 2018
 - Reduce CO2 by 270 million tons and save 530 million barrels of oil
- At the June 2011 ASTM meeting, the EMA issued a formal request for a new API performance category to help meet these new regulations
- Areas requested for improvement versus API CJ-4
 - Shear stability
 - Oxidation
 - Aeration
 - Bio-diesel compatibility (eventually dropped)
 - New lower viscosity oils to help deliver fuel economy performance
- API first license date was December 1, 2016

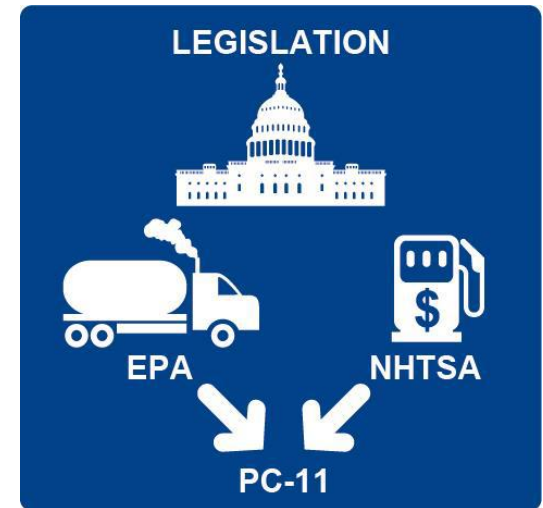

API CK-4 & FA-4: Why 2 API oil categories?

API CK-4

More Robust API CJ-4
Recommended by all OEMs
Full backward compatibility

SAE xW-30 and xW-40

HTHSV > 3.5 mPa•s
API CK-4, ACEA E

API FA-4

Robust CJ-4 at lower viscosity
Some OEM's opted out
Not backward serviceable



SAE xW-30

HTHSV: 2.9 – 3.2 mPa•s
API FA-4, New ACEA F

API CK-4 has the same durability requirements as API FA-4 to minimize risks associated with the new lower viscosity fuel economy grades



Note: Upper left hemisphere can be any contrasting color.



API CK-4 & FA-4: Test requirements

- Combination of new and carry forward tests from API CJ-4

	Test	Performance Parameters	Fuel Sulphur
Legacy Tests	Caterpillar C13	Piston Deposits, Oil Consumption	15 ppm
	Caterpillar 1N	Aluminum Piston Deposits, Oil Consumption	500 ppm
	Cummins ISB	Valve Train Wear	15 ppm
	Cummins ISM	Valve Train Wear, Filter Plugging, Sludge	500 ppm
	Roller Follower Wear Test	Roller Follower Pin Wear	500 ppm
	Mack T-11	Soot Induced Viscosity Increase	500 ppm
	Mack T-11A	Sooted Oil Low Temperature Pumpability	500 ppm
	Mack T-12	Ring/Liner Wear parameters only	15 ppm
	Kurt Orbhan 90 cycle	Shear Stability Bench Test	No Fuel Used
New	Volvo T-13	Oxidation	15 ppm
	Caterpillar C13 Oil Aeration Test (COAT)	Oil Aeration	15 ppm



API and ILSAC gasoline specifications

ILSAC Category	Status	ILSAC Service Recommendations
GF-6	Pending	Legislation to reduce emissions and improve fuel economy is driving changes in passenger car hardware system design and engine operation, which places increased demands on the engine oil. These factors, combined with the demise of some of the engine tests used in ILSAC GF-5, were the key drivers behind the ILSAC GF-6 Needs Statement, which was first published in 2011.
GF-5	Current	Introduced in October 2010 for 2011 and older vehicles, designed to provide improved high temperature deposit protection for pistons and turbochargers, more stringent sludge control, improved fuel economy, enhanced emission control system compatibility, seal compatibility and protection of engines operating on ethanol containing fuels up to E85.
GF-4, GF-3, GF-2, GF-1	Obsolete	Use GF-5 where GF-4, GF-3, GF-2 or GF-1 is recommended.



API and ILSAC gasoline specifications

API Category	Status	API Recommendations
SN, SN with Resource Conserving	Current	For 2011 and older vehicles, designed to provide improved high temperature deposit protection for pistons, more stringent sludge control and seal compatibility. API SN with Resource Conserving matches ILSAC GF-5 by combining API SN performance with improved fuel economy, turbocharger protection, emission control system compatibility and protection of engines operating on ethanol containing fuels up to E85.
SM	Current	For 2010 and older automotive engines.
SL	Current	For 2004 and older automotive engines.
SJ	Current	For 2001 and older automotive engines.
SH, SG, SF, SE, SD, SC, SB, SA	Obsolete	Not recommended for modern gasoline engines.

ILSAC

What is ILSAC?

- International Lubricant Standardization and Advisory Committee
- A committee consisting of major US vehicle manufacturers and JAMA formed in 1992
- Chrysler, General Motors (GM), and Ford
- Honda, Isuzu, Mazda, Mitsubishi, Nissan, Subaru, and Toyota

What does ILSAC do?

- Sets complementary specs to API passenger car specs to include fuel efficiency and catalyst protection
- Goes beyond 'engine protection' which is the basis for the API specs
 - Protects the catalyst system and adds a fuel efficiency measurement
- During update of ILSAC specifications the previous specification is only valid during a one year transition period
 - API specification become obsolete when no longer required or the tests are unavailable



API SN and ILSAC GF-5 overview

- API SN designed to:
 - Improve deposits control
 - Improve sludge control
 - Ensure seal compatibility
- API SN-RC (resource conserving) and ILSAC GF-5 provide additional benefits, assisting OEMs in meeting regulatory requirements and providing additional benefits to the end-user:
 - Emissions system protection (reduced phosphorus and sulphur, and retained phosphorus requirement)
 - Improved fuel economy (Corporate Average Fuel Economy Requirements, CAFE)
 - Turbocharger protection
 - Engine protection for fuels containing up to 85%(m) ethanol (E85)
- ILSAC GF-5 mandatory use for API Certification Mark was October 1st 2011
- Same engine test requirements as for API SN
 - However in addition, ILSAC GF-5 must meet FUEL ECONOMY requirements as evaluated by the Sequence VID engine test
- In practice, ILSAC GF-5 finds application only to grades favourable to fuel economy:
 - e.g. 0W-20, 0W-30, 5W-20, 5W-30, 10W-30



Engine tests for API SN/ILSAC GF-5

Lubricant property	Test	Engine description
Oxidation control	Sequence IIIG	Year 1996, GM 3.8L V-6
Viscosity of aged oil (only required for certain viscosity grades)	Sequence IIIGA (or ROBO) [#]	Year 1996, GM 3.8L V-6
Phosphorus Retention	Sequence IIIGB [*]	Year 1996, GM 3.8L V-6
Wear control	Sequence IIIG Sequence IVA	Year 1996, GM 3.8L V-6 Year 1994, Nissan 2.4L 4 Cylinder
Sludge and varnish control	Sequence VG	Year 2000, Ford 4.6L V-8
Bearing corrosion resistance	Sequence VIII	Coordinated Lubricants Research (CLR) 0.7L Single Cylinder
Fuel economy	Sequence VID [*]	Year 2009, GM 3.6L V6

*Sequence VID and Sequence IIIGB not required for API SN
(are only required for “API SN with Resource Conserving” or ILSAC GF-5)

ROBO Test (Romaszewski Oil **B**ench Oxidation test).




Likely Engine tests for incoming ILSAC GF-6

Lubricant property	Test	Engine description
Oxidation control – replaces IIIG	Sequence IIH	2012 FCA 3.6L
Wear control – replaces IVA	Sequence IVB	2010 Toyota 1.5L PFI
Sludge and varnish control – replaces VG	Sequence VH	20xx, Ford 4.6L PFI
Bearing corrosion resistance	Sequence VIII	Coordinated Lubricants Research (CLR) 0.7L Single Cylinder
Fuel economy – replaces VID	Sequence VIE	2012 GM 3.6L PFI
Fuel economy – new	Sequence VIF	2012 GM 3.6L PFI
Pre-ignition – new	LSPI	2016 Ford 2.0L GDI
Wear – new	Chain Stretch	2016 Ford 2.0L GDI



Engine Oil Licensing and Quality Management

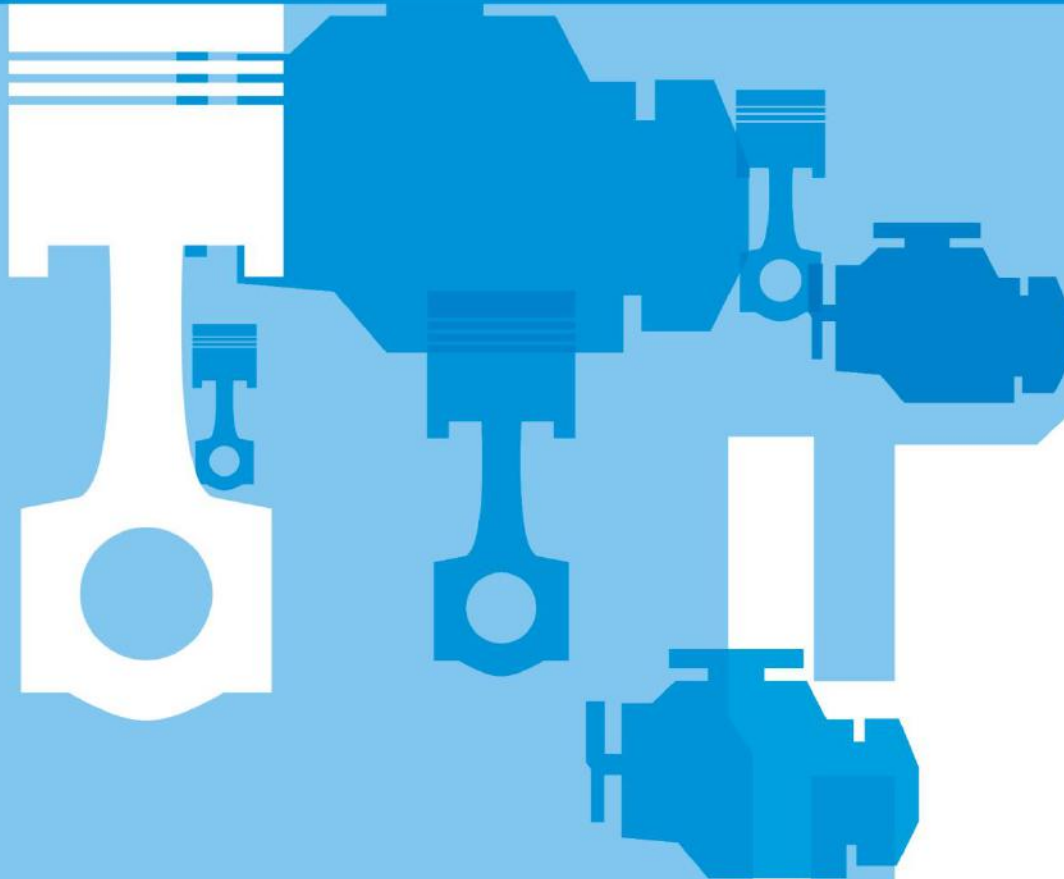

Industry Codes of Practice

ACC


ATC

API


ATIEL

- Members include Lubricant additive suppliers e.g. Infineum
 - Covers oil development aspects from additive supplier perspective
 - Allowed changes to additive package and its components
 - Allowed changes to viscosity modifier
 - Promotes quality of engine testing via specified protocols
 - Specifies procedures to assist data reporting & traceability
-
- Members include major oil companies e.g. BP, Shell, Exxon Mobil
 - Addresses oil development aspects from oil marketer perspective
 - Guidelines for base oil interchange (BOI)
 - Guidelines for viscosity grade read across (VGRA)
 - Covers other aspects such as data reporting and (for API) licensing

Overview

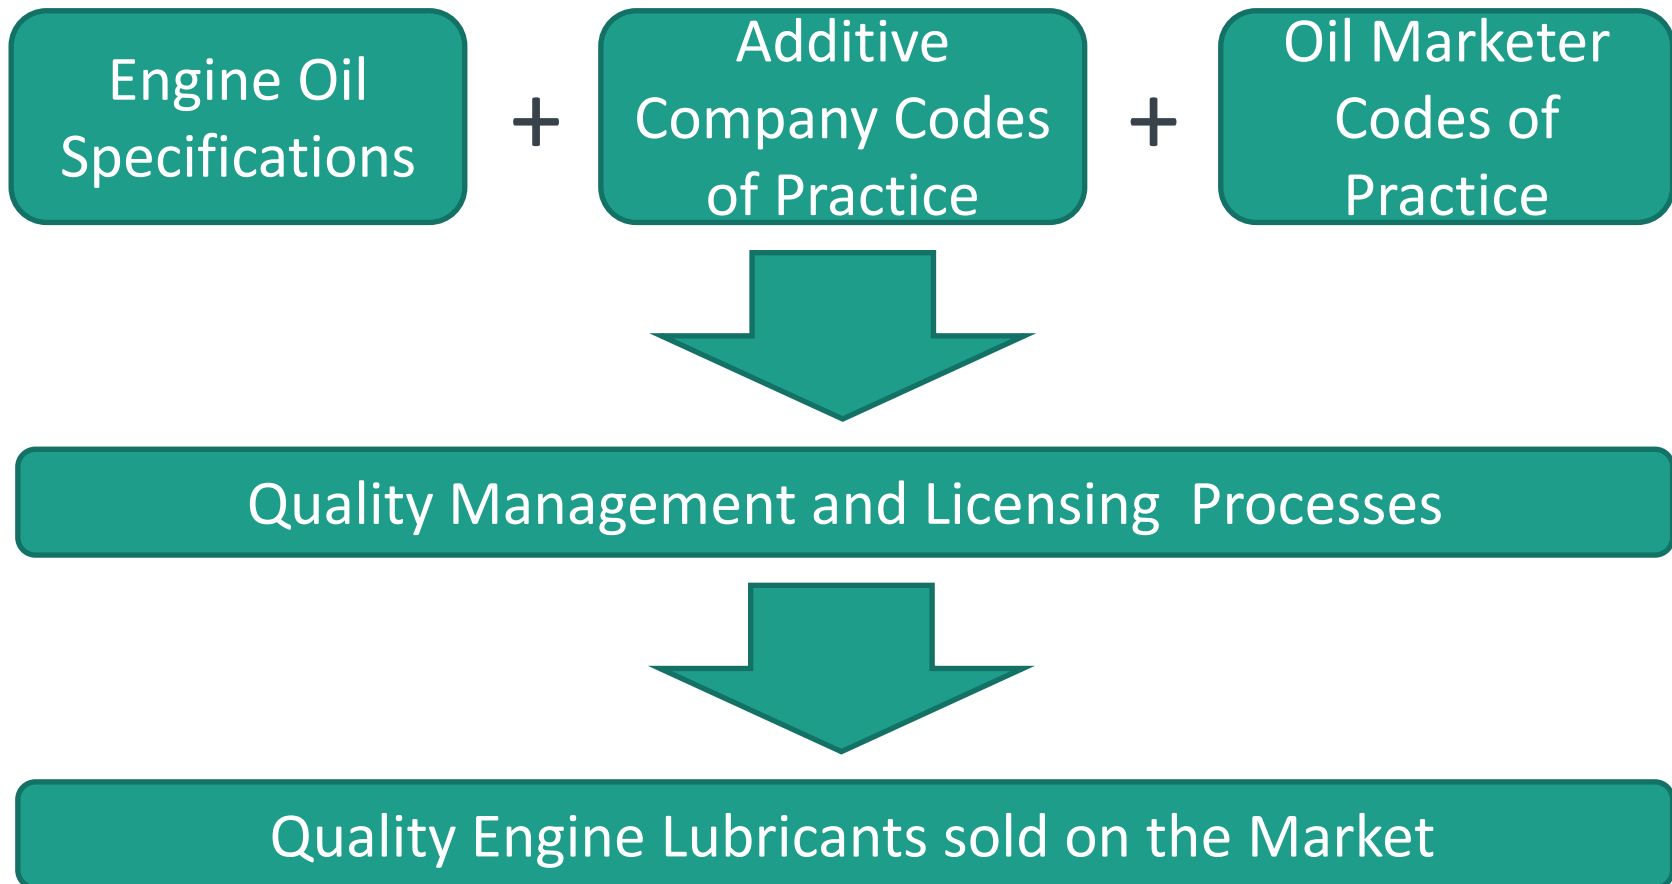


How this works in Europe

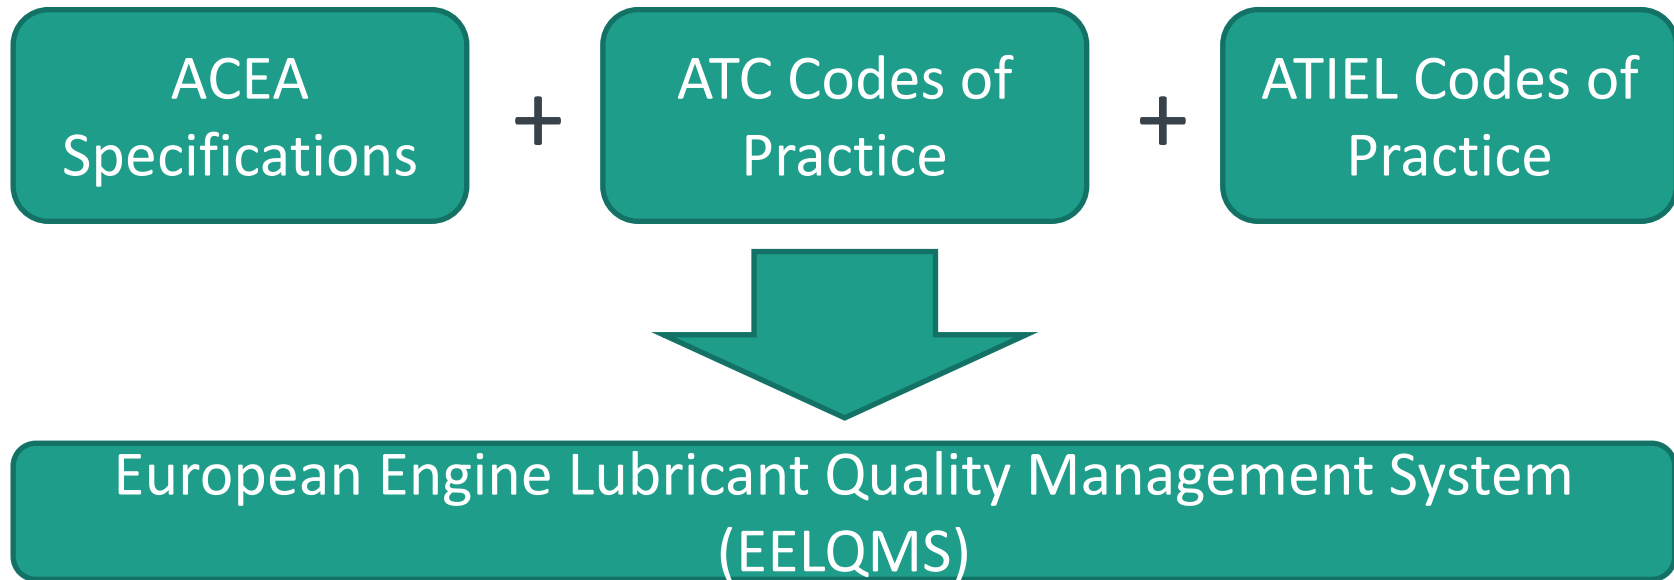

- **Joint** ACEA, ATIEL and ATC development
- **Voluntary** unless required by 3rd parties
- **Self-certification** system, no license issued
- The only system used to support ACEA claims - allows marketers to put claims on products
- Provide detailed process/structure to support product development, product validation/claims and lubricant production

How this works in North America

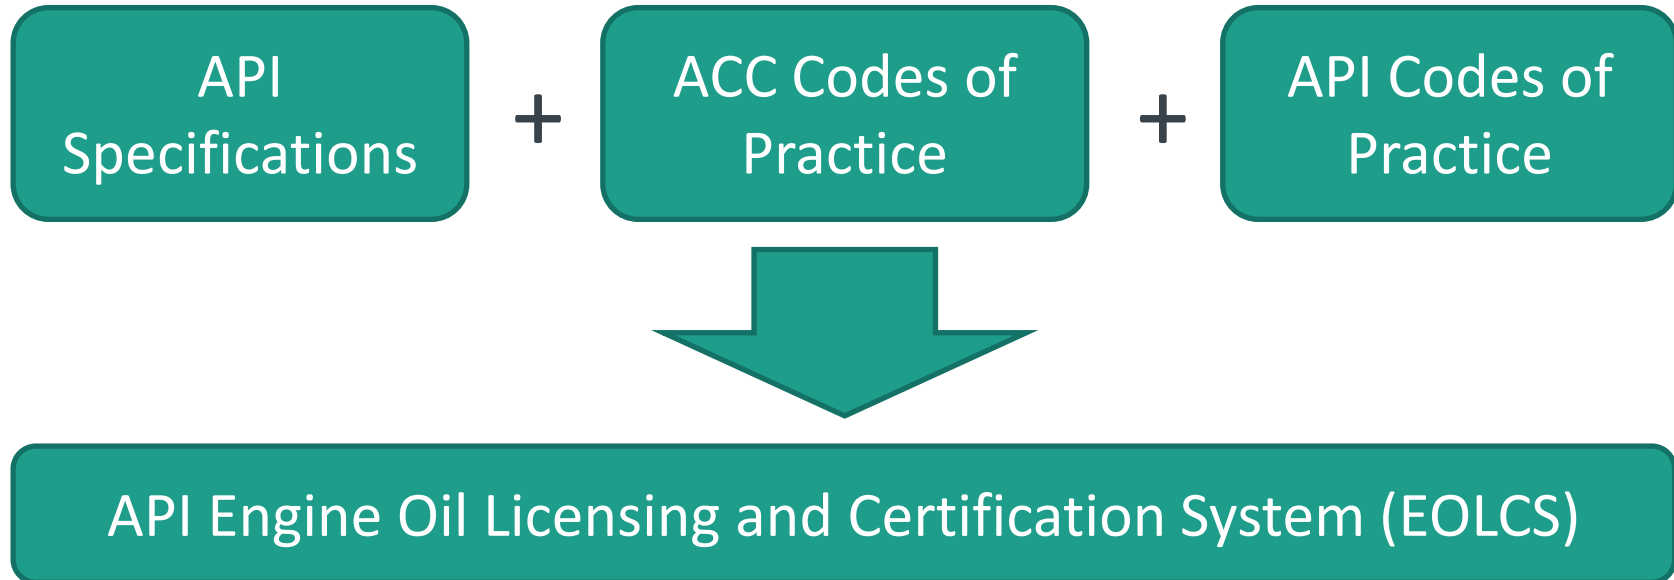

- A voluntary licensing and certification program Issued by API
- Defines, certifies and monitors engine oil performance in North America
- Issues licensing marks
- Ensures compliance by auditing
- Oil marketer is ultimately responsible

Comparison of API licensing marks



**API Service Symbol
'donut'**

Used for API claims



**API Certification Mark
'starburst'**

As used for ILSAC claims

Summary

- OEMs continue to challenge the oil and additive industries with increased quality level requirements – this drives the introduction of new specifications
- Marketers must offer oils that meet both industry and OEM specifications
- Category life challenges return on investment for the entire industry
- The number and complexity of industry and OEM specifications increase as OEMs introduce new hardware and emission system solutions
- Diversity in specification requirements cause increased fragmentation of products in the marketplace



Permission is given for storage of one copy in electronic means for reference purposes. Further reproduction of any material is prohibited without prior written consent of Infineum International Limited.

The information contained in this document is based upon data believed to be reliable at the time of going to press and relates only to the matters specifically mentioned in this document. Although Infineum has used reasonable skill and care in the preparation of this information, in the absence of any overriding obligations arising under a specific contract, no representation, warranty (express or implied), or guarantee is made as to the suitability, accuracy, reliability or completeness of the information; nothing in this document shall reduce the user's responsibility to satisfy itself as to the suitability, accuracy, reliability, and completeness of such information for its particular use; there is no warranty against intellectual property infringement; and Infineum shall not be liable for any loss, damage or injury that may occur from the use of this information other than death or personal injury caused by its negligence. No statement shall be construed as an endorsement of any product or process. For greater certainty, before use of information contained in this document, particularly if the product is used for a purpose or under conditions which are abnormal or not reasonably foreseeable, this information must be reviewed with the supplier of such information.

Links to third party website from this document are provided solely for your convenience. Infineum does not control and is not responsible for the content of those third party websites. If you decide to access any of those third party websites, you do so entirely at your own risk. Please also refer to our Privacy Policy.

INFINEUM, 润英联 and the interlocking ripple device are Trade Marks of Infineum International Limited.

© Infineum International Limited 2017. All rights reserved.

